


OFFSHORE RACING CONGRESS

World Leader in Rating Technology



www.orc.org

ORCsy VPP 2017 DOCUMENTATION

1 Summary

1	Summary	1
2	Introduction.....	3
3	Hydrodynamic modifications - Hydrostatic.....	3
3.1	Lightship and Sailing Trim displacement	3
3.2	Righting moment.....	4
3.3	Added resistance in waves	4
3.4	Centerboard not lifted downwind.....	5
3.5	Fresh water ballast.....	5
3.6	Bow Thrusters	5
3.7	Tacking Time Loss.....	5
4	Aerodynamic modifications.....	6
4.1	Aerodynamic model	6
4.2	Effective height	9
4.3	Windage	10
4.3.1	Furled headsail windage	10
4.3.2	Superstructures: cabin trunk, doghouses.....	10
4.3.3	Superstructures: domes	11
4.3.4	Superstructures: generic windage element.....	11
4.3.5	Mast diameter.....	11
4.4	Bowsprit Length (power function).....	11

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

4.5	Multiple headsails	12
4.6	Sails inventory credit/penalty	12
4.7	Boom furling systems.....	12
4.8	Headsails tacked on a sprit	12
5	Hydrodynamic modifications.....	13
5.1	Residuary resistance	13
5.2	Induced darg of very shallow draft boats	13
5.3	Centerboards: slot added resistance and effective draft	14
5.4	Phi_up.....	14
6	Dynamic Allowance.....	14
6.1	Dynamic Allowance	14
7	Other Modifications	14
7.1	MCA Approved boats	15
7.2	PIPA (propeller projected area).....	15
7.3	SY factor	16
7.4	Winch Speed and Power	16
7.5	Age Allowance	17
8	Handicaps Composition	17
8.1	Handicaps Table.....	17

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

2 Introduction

This document contains a short description of the modifications made to the ORC INT VPP to create the new ORC SY VPP.

Please refer to the following documents (available for downloading at the www.orc.org/rules web site) for any further information about ORC rules and VPP's:

1. INTERNATIONAL MEASUREMENT SYSTEM – IMS 2017
2. ORC RATING SYSTEMS 2017
3. ORC VPP DOCUMENTATION 2017
4. ORC SUPERYACHT RULE 2017
5. ORC SY MEASUREMENT GUIDANCE 2017 – Release 1.0

3 Hydrodynamic modifications - Hydrostatic

3.1 Lightship and Sailing Trim displacement

For non-measured boats the lightship displacement and VCG are deduced from the stability booklet. The sailing displacement is calculated from lightship DSPL by adding the following:

- Default crew weight
- Default gear weight
- Default sail weight
- Declared liquids
- Declared anchors

The default crew weight is calculated as:

$$creweight = ORC_DEF_CW \cdot cw_{mult}$$

With

$$ORC_DEF_CW = 25.8 \cdot LSM0^{1.4262}$$

$$cw_{mult} = 1.0625 - 0.00125 DSP0/1000$$

DSP0 is the lightship displacement.

The factor cw_{mult} is bounded in the range [0.3 , 1.0].

The defaults weights of mainsail and other sails are (in kg):

$$mainsail = 0.1709 \cdot LSM0^{2.1821}$$

$$headsail = 0.0677 \cdot (LSM0)^{2.3493}$$

$$spinnaker = 0.1426(LSM0)^{2.0568}$$

while the default gear weight is 16% of the ORC_DEF_CW .

For anchor and chain an adjustment of the gyradius is calculated too, using the existing ORC model.

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

For measured boats the inventory list made during floatation is used to derive the lightship trim displacement. Moreover, in the same list the items carried on board while sailing that are added for the calculation of sailing displacement are reported too.

Liquids are declared by the captain before the race.

In addition the following default weights will be accounted:

- Default crew weight

The default crew weight is calculated as:

$$\text{creweight} = \text{ORC_DEF_CW} \cdot \text{cw}_{\text{mult}}$$

With

$$\text{ORC_DEF_CW} = 25.8 \cdot \text{LSM0}^{1.4262}$$

$$\text{cw}_{\text{mult}} = 1.0625 - 0.00125 \text{ DSP0}/1000$$

DSP0 is the lightship displacement.

The factor cw_{mult} is bounded in the range [0.3 , 1.0].

- Default Racing gear weight (16% of the *ORC_DEF_CW*)
- Default sails weight

$$\text{mainsail} = 0.1709 \cdot \text{LSM0}^{2.1821}$$

$\text{headsail} = 0.0677 \cdot (\text{LSM0})^{2.3493}$ multiplied by the declared number of headsails (max 3 will be accounted)

$\text{spinnaker} = 0.1426 \cdot (\text{LSM0})^{2.0568}$ multiplied by the declared number of spinnaker (max 3 will be accounted)

The complete procedure is described in the Measurement Guidance document.

3.2 Righting moment

The measured righting moment is used by the VPP, not the averaged righting moment with a statistical default RM. Non-measured boats have a 5% increase of RM coming from their Stability Booklet.

3.3 Added resistance in waves

In order to emphasize the difference between flat and rough water performances, the ORC added resistance in waves has been modified by re-defining the wave spectrum versus TWS.

In addition (taking into account the formulations explained in ORC DOCUMENTATION 2016 chapter 6.5.2) the dimensional factor has been modified from $L \cdot \log(L/30)$ to $L^{1.15} \cdot \log(L/30)$, thus helping slightly the larger boats.

The effect of this term is that a 60 m boat has its resistance in waves 20% higher than a 30 m boat, compared to the ORCi VPP.

In addition, the gyradius term $f(\text{Kyy}) = 0.01575 \cdot (\text{GYR} - 0.23)$ was increased by 33% in the rough water run, to amplify the effect on big and heavy boats that have very high gyradius values.

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

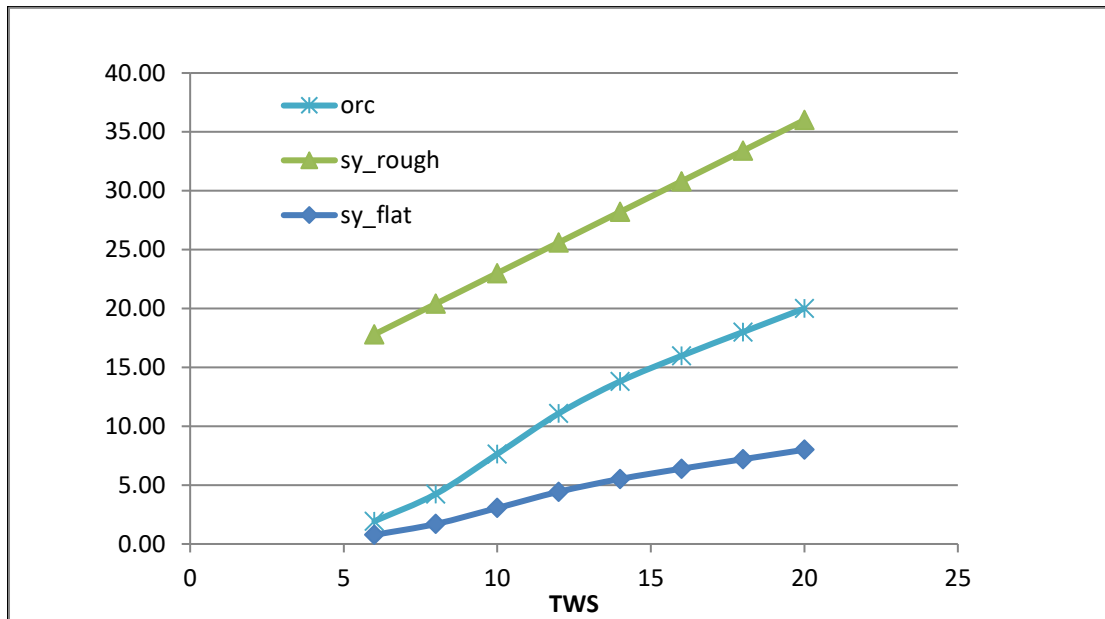


Figure 1. ORC and SY true wind speed behavior of the added resistance in waves.

3.4 Centerboard not lifted downwind

A flag has been introduced for accounting for the configuration of some boats that do not lift their centerboard in the reaching/downwind runs. In this case the additional resistance of the board down is taken into account.

3.5 Fresh water ballast

The SY VPP takes into account the possibility of carrying ballast filled with fresh water that is not discharged sailing downwind.

So the displacement is increased by the water ballast weight in any conditions while a double run is performed, one with ballast only on one side and one with ballast equally distributed on the windward and leeward sides.

3.6 Bow Thrusters

Only open tunnel thrusters are taken into account (no retractable or closed tunnel thrusters are accounted).

The computed credit is an added hull wetted area equal to 3 times the bow thruster tunnel area.

3.7 Tacking Time Loss

The tacking time loss is based on the sail area-displacement ratio:

$$TA(\%) = 0.02 \cdot (TA1 + TA2) \cdot 100$$

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

$$TA1(\%) = 0.02 \cdot \frac{0.16 - D_{Lr}}{0.07} \cdot 100$$

$$TA2(\%) = 0.02 \cdot (5 - SA_{DISPL}) \cdot 100$$

$$D_{Lr} = \frac{D_{HK} + 0.3ECM}{LSM}$$

$$SA_{DISPL} = \frac{\sqrt{SA}}{\left(\frac{DPSL}{1025}\right)^{.33}}$$

Where TA, and also its components TA1 and TA2 are bounded between 0 and 2%. Another 1% is applied when a headsail is furled more than 50% when tacking and reduced at 0.75% when an inner jib is unfurled to help the tacking. Another 1% is added when a full height skeg is present in front of the rudder. The above allowance is used only in upwind conditions.

4 Aerodynamic modifications

4.1 Aerodynamic model

The ORC SY VPP aero model makes use of a global sailplan approach. Initially global aero coefficients for three rigs (sloop, ketch, schooner) have been assembled by Martyn Prince from the Wolfson Unit database, along with typical values of effective height. After noticing that the performances were much faster than those obtained with ORC INT VPP aero model, the coefficients have been re-modulated trying to reproduce similar handicaps for typical boats. In doing this, the relative ratios of coefficients among different rigs have been maintained.

Beside the above mentioned rigs, gaff sloop, gaff schooner and gaff50 schooner have been introduced. This last represents a rig with one triangular mainsail and one gaff mainsail. They differ from the Marconi essentially for a different value of the effective height and for a different lower boundary of the depowering *flat* parameter. While the default value for the minimum flat is 0.62, for the gaff schooner it is 0.85, and for gaff sloop and gaff50 schooner it is 0.78. This setting tries to reflect in the mathematical model the lesser ability of the gaff rigs in reducing the camber of the sails as the wind increases.

Three sets of global coefficients are included into the aero model:

- one for the upwind configuration with luffed headsails (mainsail+upwind luffed headsails, or main+mizzen+upwind luffed headsails)
- one for the upwind configuration with non-luffed headsails (mainsail+upwind non-luffed headsails, or main+mizzen+upwind luffed headsails)
- one for downwind configuration (main+spinnaker, or main+mizzen+spinnaker+mizzen staysail)

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

A mizzen reacher could also be taken into account, but its effect is smoothly nullified at apparent wind angles lower than 60 degrees.

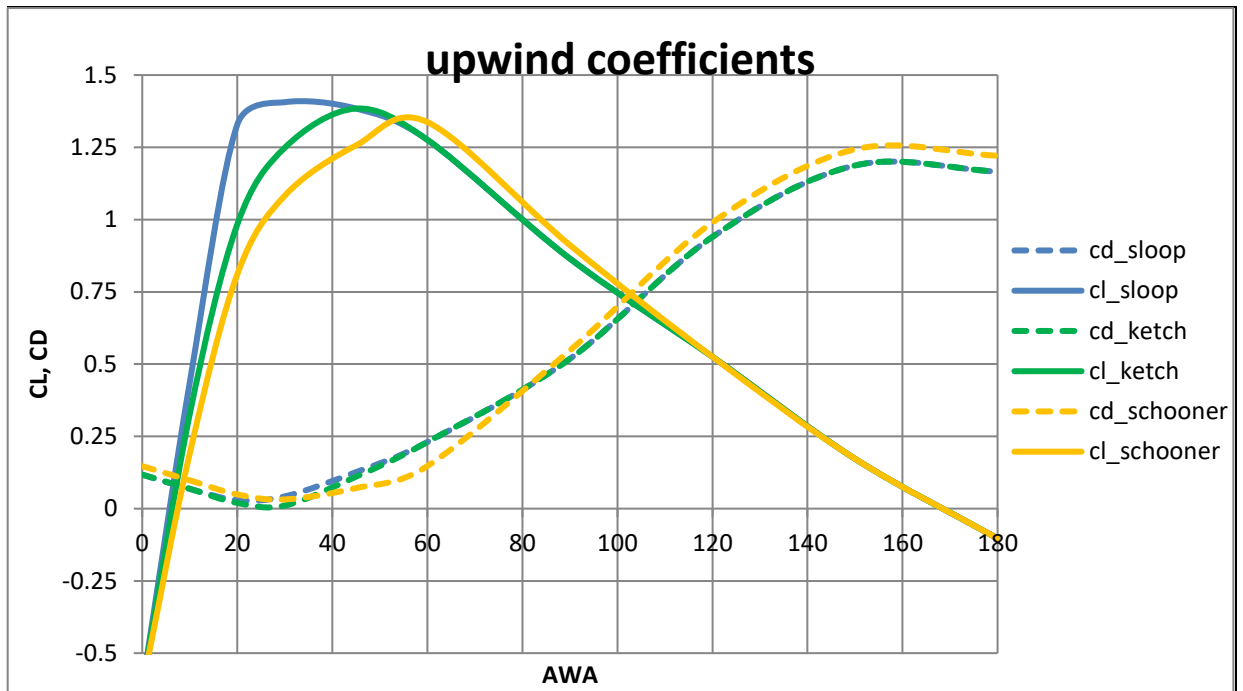


Figure 2: upwind aerodynamic coefficients.

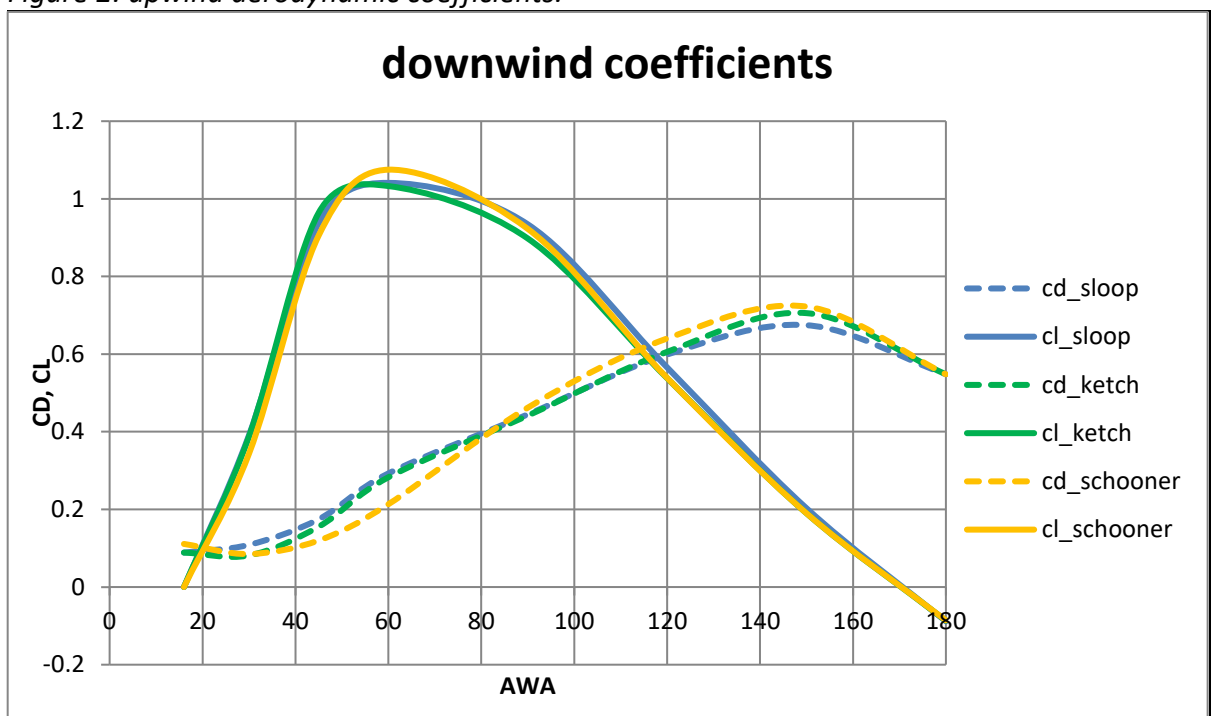


Figure: downwind aerodynamic coefficients.

Regarding the luffed headsails, two different upwind runs are taken into account:

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

1. One with the largest headsail declared in the inventory (normally an overlapping jib in big cruising boats) treated without any depowering (no reefing and no flattening)
2. A second one with the second largest jib declared (if any) treated with normal depowering (reefing and flattening). If this jib is smaller than the minimum jib area, the minimum jib is taken into account for this run, where the minimum jib area is:

$$A_{\text{reamin}} = 0.300 \cdot J \cdot \sqrt{J^2 + IM^2}$$

If a boat declares only one headsail with overlap greater than 115% there is a double run as above, where the second run is made with the minimum jib.

If the boat has no overlapping headsail, the first run is not performed and there is only a normal run with depowering made with the biggest non-overlapping headsails.

In the most complete case, the VPP will calculate:

- an 'upwind' polar (including upwind VMG) using the sail area of the sails carried when beating upwind with the largest luffed headsail. No depowering is applied.
- a second 'upwind' polar with the sail area calculated using the headsail with the second largest luff, with depowering
- a 'flying headsail' polar, using the flying headsail area
- a 'downwind' polar using the sail area of the sails carried when running.

Then, for each wind speed and angle (TWS, TWA) the 'best' performance is extracted, selecting from among the three the one with largest boat speed (or VMG if for the best upwind and downwind cases).

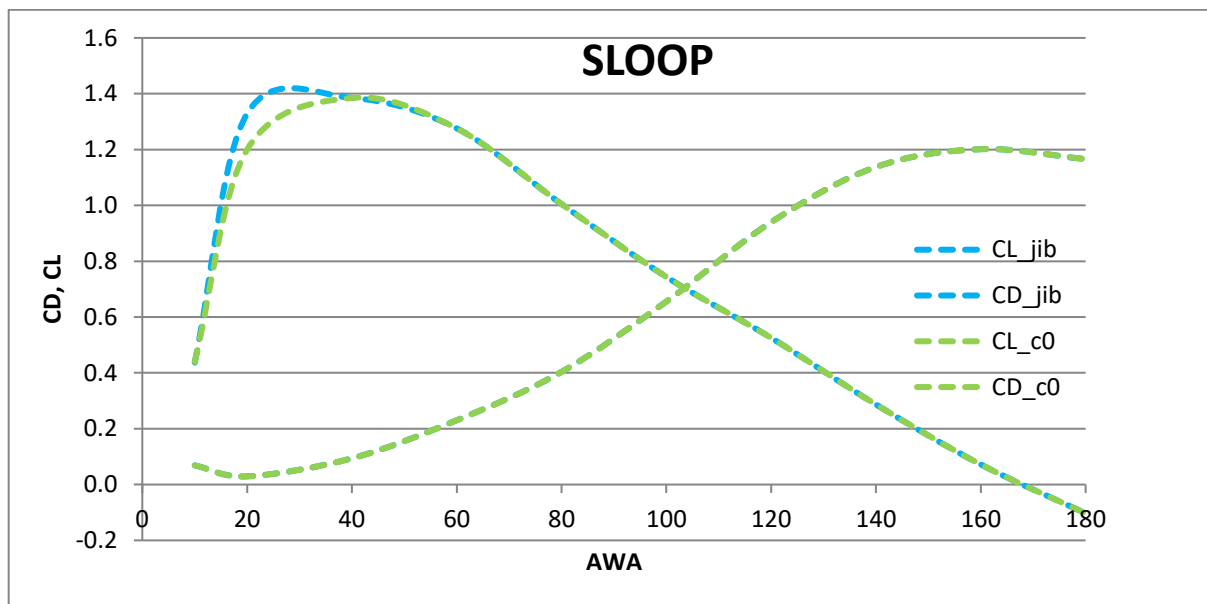


Figure3: example of global lift-drag coefficients of luffed headsails (cyan) vs. flying headsails (green), sloop rig.

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

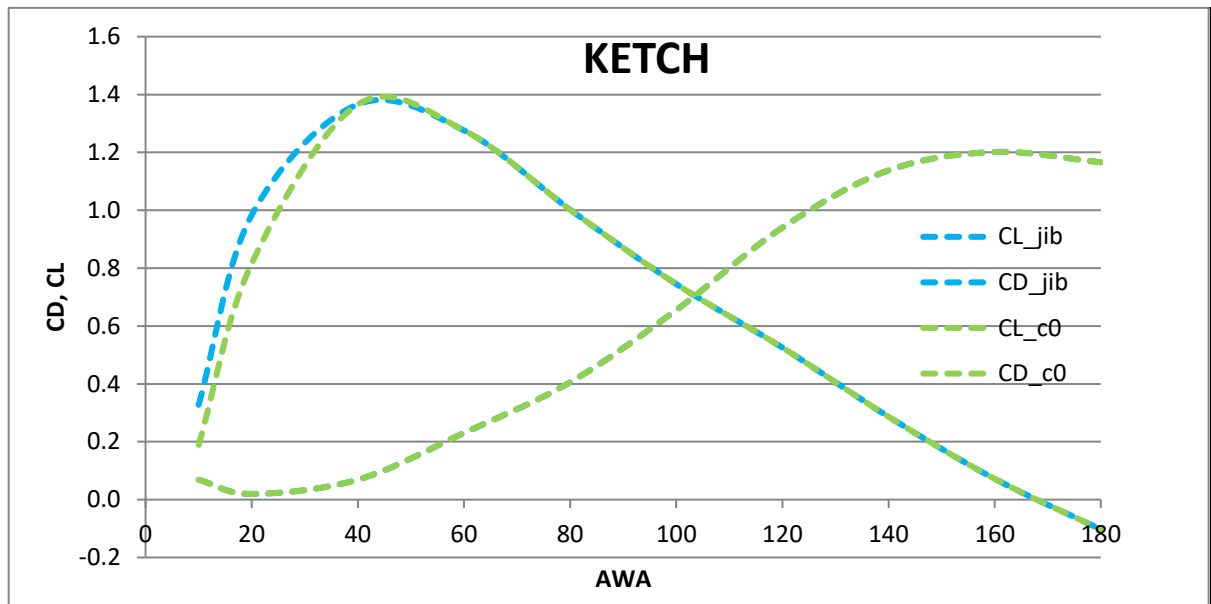


Figure4: example of global lift-drag coefficients of luffed headsails (cyan) vs. flying headsails (green), ketch rig.

Regarding the difference of spinnaker on CL and spinnaker on pole, the ratio of ORC coefficients has been reproduced, weighting the modification only on the portion of the sailplan area pertaining to the spinnaker.

Non-spinnaker boats gets from the VPP a 'default' MINIMUM spinnaker area, as in ORCI with a small reduction of the minimum area (-15%) to avoid any rush versus non-spinnaker configurations.

The dummy spinnaker taken into account when a boat is not declaring any spinnaker will be computed taking into account the sail area carried with the largest headsail, including the flying headsail.

The minimum spinnaker area is:

$$area = 0.538 \cdot \sqrt{J^2 + ISP^2} \cdot \max(1.8 \cdot J, 1.6 \cdot TPS, 1.8 \cdot SPL)$$

4.2 Effective height

Regarding the induced drag, the effective height is modeled as

$$Heff = Heff0 + heff_{corr} * be(AWA)$$

where $Heff0$ is the base term, equal to 1.0 the mast height for sloops, and 0.98 for ketches, 0.95 for schooners, 0.83 for gaff schooners, 0.89 for gaff sloops and gaff50 schooners.

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

$heff_corr$ is the correction term, the formulation for sloops is:

$$heff_{corr} = 0.10 + 0.08 * (roach - 0.20)$$

For ketches and schooners (and also gaff sloops) the term 0.10 becomes null. Roach is the excess of mainsail area over the triangular area.

The function $be(AWA)$ is a shape function being 1 below 30 degrees and smoothly going to 0 at 60 degrees.

Since there is a large variety in the mizzen/main mast ratio in ketches, the effective height varies following the PY/P ratio: it is increased, smoothly blending to that of a sloop when PY/P goes from 0.7 to 0.3, while on the contrary it is decreased smoothly blending to that of a schooner when PY/P is in the range between 0.7 and 1.0.

The CEH of the sailplan is at present based on a fraction of the mast height (0.36 for the upwind and reaching sailset, 0.46 downwind). For ketches the mast height is calculated weighting 80% the main and 20% the mizzen, while for schooners the weight is 50% - 50%.

4.3 Windage

4.3.1 Furled headsail windage

Instead of measuring a diameter for each furled sail, it seemed preferable to derive a default diameter from rig & sail data, that is luff and area of the furled sail: JL_k and Jib_area_k.

Assuming that the sail cloth has a thickness t , and is furled around a circular luff of initial diameter D_0 , it can be shown that the number of turns around the stay to furl all the LP of the sail is

$$N = \frac{-\pi D_0 + \sqrt{(\pi D_0)^2 + 4\pi t \cdot LP}}{2\pi t}$$

and therefore the max diameter of the furled sail is

$$D_{max} = 0.8(D_0 + 2Nt)$$

The frontal area is $A_{fr} = 0.6 \cdot IG \cdot D_{max}$, while the side area is $A_{side} = 0.6 \cdot JL \cdot D_{max}$, the 0.6 factor is taking into account the tapering of the furled sail.

The two basic parameters t and D_0 are simply related to IG.

$$t = 0.00015 \cdot IG$$

$$D_0 = 0.002 \cdot IG$$

With the above model the only measures affecting the furling credit are the **IG** and **J** of the considered stay. No more input is needed. When not known, JL is derived from IG and J, and LP is assumed to be $1.1 \cdot J$.

4.3.2 Superstructures: cabin trunk, doghouses

The present windage model for superstructures needs the following inputs:

- a superstructure frontal area,

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

- a superstructure side area.

The areas are calculated above a line 600 mm above the sheerline.

4.3.3 Superstructures: domes

The input is the dome(s) frontal area. CEH is assumed $0.25 \cdot IG$.

4.3.4 Superstructures: generic windage element

The windage of the superstructures and domes can be evaluated knowing the frontal and side area, and LCG and VCG. Then, a Cd has to be assigned.

The formulation of the Cd resulting from the composition of frontal and side areas is coded as follows:

$$Cd = (Cd_{front} * A_{fr} * \cos \beta + Cd_{side} * A_{side} * \cos \varphi * \sin \beta) / A_{ref}$$

where $Cd_{front} = 0.6$, and $Cd_{side} = 0.8$ for cabin trunk, while $Cd_{front} = Cd_{side} = 0.9$ for domes and furlers, and $A_{ref} = A_{fr} + A_{side}$. For domes it is assumed $A_{fr} = A_{side}$.

4.3.5 Mast diameter

When mast diameters (MDL1, MDT1, MDT2, MDL2, MW, GO, TL) are not provided a default mast diameter dimension for windage calculations has been introduced.

The default MDL and MDT are derived from RM curve (as is in the ORC default mast weight calculation). They are increased by 15% if there is a mainsail furler.

$$MDL1 = 0.45 \cdot 0.036 \cdot (IG \cdot RM@25)^{0.25}$$

$$MDT1 = 0.5 \cdot MDL1$$

Default MDL2, MDT2, TL, MW and GO are derived by the two above

For Ketches and Schooners also the second mast is considered for windage, with a diameter increase/decrease proportional to the second mast height ratio to the first mast.

4.4 Bowsprit Length (power function)

The power function works in a way that it is a multiplier of the spinnaker area.

It is based on the ratio between the gennaker (or spinnaker) area and the available room $ISP \cdot TPS$ (or SPL if there is a pole). The smaller the area compared to the available room, the sail is considered more efficient, and the larger the power function:

$$power = 1 + \left(1.391 \cdot \frac{ISP \cdot TPS}{Area} - 1 \right)^{1.5}$$

The power factor is bounded to a maximum value of 1.1, and a minimum of 1.0.

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

4.5 Multiple headsails

When multiple headsails are set together (especially in schooners) a dummy headsail is created with the maximum JL and LPG from the forward stay to the more aft clew.

This area is less than the sum of the 2 or 3 jibs.

A further efficiency factor of 90% for boats with 3 headsails or more is introduced.

If the inner jib or staysail is set with the clew forward of the outside bigger genoa the inner staysail is for free.

4.6 Sails inventory credit/penalty

The composition of the sail's inventory is taken into account.

The VPP applies an upwind credit/penalty depending on the size of the inventory.

Moreover, this allowance is further adjusted taking into account if a boat can effectively change its headsail during a race, ie, whether the headstay is equipped with a furler, with hanks or with a headfoil.

One headsail set flying is not accounted

No. of headsails for beating upwind	Allowance with furler (+credit, -penalty)
1	+1%
2	0%
3+	-1%

A similar approach is adopted also for the downwind sails:

No. of SPI	Allowance (+credit, -penalty)
1	+1%
2	0%
3+	-1%

4.7 Boom furling systems

It is recognized that when having a boom furler the mainsail area is evaluated on the mandrel position instead of the top of the boom. For this reason a deduction of 0.5% on the mainsail area is applied when there is a boom furler.

4.8 Headsails Tacked on a Sprit

For boats fitted with headsails tacked on a sprit the ratio J/SFJ has been taken into account to address the loss of efficiency due to the absence of deck endplate effect. The headsail area is slightly reduced by a factor

$$f_{sfj} = 0.96 \cdot (1 - t_{sfj}) + 1 \cdot t_{sfj}$$

where

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

$$t_{sfj} = \frac{\frac{J}{-SFJ} - 1}{5}$$

is the parameter that measures the bowsprit influence, and it is bounded between 0 and 1.

5 Hydrodynamic modifications

5.1 Residuary resistance

A slight correction has been introduced, affecting boats with LBR (length/beam ratio) above 4.5 and LVR (length/volume ratio) above 7.0:

$$RR = RR0 \cdot (1 + 0.05 \cdot t_{LVR} t_{LBR} t_{Fn} + 0.10 \cdot s_{LVR})$$


where RR0 is the base residuary resistance, and

$$t_{LVR} = \frac{LVR - 7.0}{7.5 - 7.0} ; t_{LBR} = \frac{LBR - 4.5}{5.5 - 4.5} ; t_{Fn} = \frac{Fn - 0.43}{0.48 - 0.43} ; s_{LVR} = \frac{LVR - 7.4}{7.8 - 7.4}$$

Are the three parameters that quantify the increase. All of them are bounded between 0 and 1. The last term is a further correction introduced with VPP 2017 version 1.04.

5.2 Induced drag of very shallow draft boats

The relationship between the effective draft has been modified by multiplying it by a factor T_{eff_mult} , which reduces the draft for boats having very shallow draft (low D/L ratio), as shown in Figure 5. A reduction has been applied also to very deep draft, since there are indications that such configurations were less efficient than predicted.

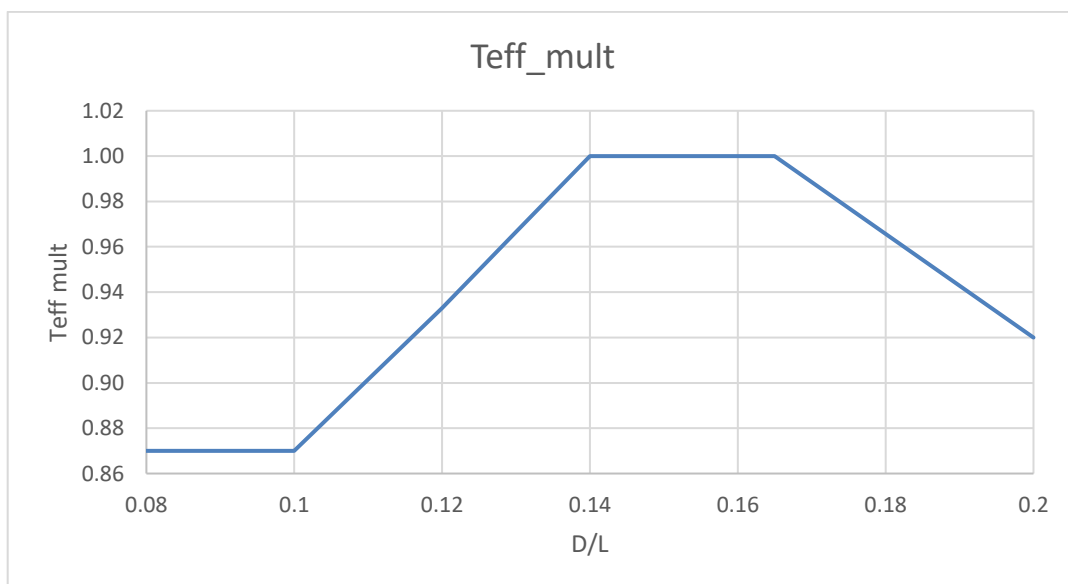

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

5.3 Centerboards: slot added resistance and effective draft

The rotating centerboards suffer by added drag due to the not perfect sealing of the slot when the board is down. This additional resistance has been taken into account without going into the details of the slot, that would have been impossible. A simple factor which increases the frictional drag of the centerboard by 50% has been applied. The contribution of the centerboard to the effective draft is quantified as 40% of span of the centerboard.

5.4 Phi_up

The so called PHI_UP (see ORC VPP Documentation, 5.5.1), that is the artificial reduction of heeling angle used by the VPP when searching the solution, was introduced in order to avoid the typeforming toward low stability boats. Since there is no worry about this trend in the SY fleet, the heel used by the VPP solver has been modified to be the average between the boat heel and the PHI_UP.

6 Dynamic Allowance

6.1 Dynamic Allowance

The ORC INT Dynamic Allowance (DA) formulation has been completely revised and a new customized one introduced to take into account the characteristics of the Super Yacht fleet.

It is composed by different terms:

The first term K1 is assigned only for boats with DISPL>120 t.

$$K1 = \left[1 + \frac{DISPL - 120000}{1200000} \right]^{0.333} * \left(\frac{6.5}{LVR} \right)^{0.333}$$

First term of K1 is bounded between 1 (for DISPL=120t) and 1.86 (for DISPL=600t), and is smoothed by the LVR term.

$$LVR = L / (DISPL/1025)^{0.333}$$

The second term K2 is based on SA/DISPL ratio:

$$K2 = \left[1 + \left(5 - \frac{SA_{DISPL}}{5} \right) \right]^2$$

Where

$$SA_{DISPL} = \frac{\sqrt{SA}}{\left(\frac{DISPL}{1025} \right)^{.33}}$$

K2 is bounded between 1 (for SA_DISPL>5) and 1.3 (for SA_DISPL<4.3).

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

$$DA(\%) = \frac{[\sqrt{K1 * K2} - 1]}{[1.56 - 1]} * 0.12 * 100$$

DA is bounded to a max of 8%, when $\sqrt{K1 * K2} = 1.56$.

The sail area calculated takes into account the sailset used upwind.

For split rigs, ketch or schooners, the smallest mainsail is accounted for 40% of its area

7 Other Modifications

7.1 MCA approved boats

MCA approved boats have a heavier displacement because of the enhanced requirements, but this is taken into account into the empty displacement evaluation. However, the weight distribution is not accounted for, so a gyradius increment (over rated L) of 0.012 is added to all MCA boats (same as the gyr decrement for having an aramid core in the composite). This affects the performance, particularly in rough water, when having more weight at the extremities is a negative factor.

7.2 PIPA (Propeller projected area)

A new default PIPA for exposed shaft has been introduced working on the database of the measured installation.

These are the formulations used:

SOLID 2 BLADES

$$PIPA = 0.113 * PRD^2 - 0.006 * PRD$$

FEATHERING 2 BLADES

$$PIPA = 0.064 * PRD^2 - 0.021 * PRD$$

FOLDING 2 BLADES

$$PIPA = 0.053 * PRD^2 - 0.011 * PRD$$

SOLID 3 BLADES

$$PIPA = 0.138 * PRD^2 - 0.006 * PRD$$

FEATHERING 3 BLADES

$$PIPA = 0.068 * PRD^2 - 0.022 * PRD$$

FOLDING 3 BLADES

$$PIPA = 0.056 * PRD^2 - 0.012 * PRD$$

SOLID 4 BLADES

$$PIPA = 1.17 * (0.138 * PRD^2 - 0.006 * PRD)$$

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

FEATHERING 4 BLADES

$$PIPA=1.046*(0.068*PRD^2-0.022*PRD)$$

FOLDING 4 BLADES

$$PIPA=1.044*(0.056*PRD^2-0.012*PRD)$$

For measured propellers, the approach of ORCI is used. The resistance of a 4 blade propeller is taken into account by modifying as follows the relevant formulas (ORC VPP Documentation, 6.2):

Shaft installation:

Folding and feathering

$$PIPA = IPA + 0.75 \cdot (0.9 \cdot PHD)^2$$

Solid

$$PIPA = IPA + 0.14 \cdot (0.9 \cdot PHD)^2$$

Strut installation:

Folding and feathering

$$PIPA = 0.06 \cdot ST1 \cdot (ST5 - 0.5ST4) + 0.44 \cdot (0.8ST4)^2$$

Solid

$$PIPA = 0.06 \cdot ST1 \cdot (ST5 - 0.5ST4) + 0.144 \cdot (PRD)^2$$

Moreover, for the “in aperture” installation, a difference also between the 2 and 3 blades has been introduced. Following what is modelled for other installations, each additional blade of a feathering propeller produces an increment of 4.5% of the 2-blades PIPA, while a solid propeller blade produces an increment of about 17% of the 2-blades PIPA.

7.3 SY factor

The ‘SYfactor’ has been deleted in 2017.

7.4 Winch speed and power

A model has been introduced based on the winch speed (m/min) for both halyard and jib sheet winches.

A reference ‘fastest’ hoist time is established based on $t_{0_h}=ISP/v_{h_max}$ and similarly a reference ‘fastest’ sheeting time is calculated based on $t_{0_s}=J/v_{s_max}$, where v_{h_max} and v_{s_max} are the maximum hoist and sheet winch speed declared so far (180 m/min). The allowance is calculated considering the time difference between the fastest hoist and sheet time and the real hoist and sheet time $t_h=ISP/v_h$ and $t_s=J/v_s$ respectively, based on the winch speed declared:

$$pw_h = \frac{t_h - t_{0_h}}{t_{0_h}} \cdot 0.0025 \quad pw_s = \frac{t_s - t_{0_s}}{t_{0_s}} \cdot 0.0025$$

OFFSHORE RACING CONGRESS

World Leader in Rating Technology

The allowance is only positive or null. The maximum allowances for hoisting and sheeting have been fixed at 0.25% (this allowance was chosen considering a couple of hoists for each race).

7.5 Age allowance

There is no age allowance in the SY VPP.

8 Handicaps Composition

8.1 Handicaps Table

Handicaps are now based on 4 time allowances: light (TWS≤9kts), moderate (9<TWS≤13), medium (13<TWS≤17), and strong (TWS>17kts).

The composition of the handicaps is based on the circular random time allowance, with the average weighed as in the table below:

TWS:	6	8	10	12	14	16	20
light	35%	55%	10%				
Light-moderate		10%	40%	40%	10%		
Moderate-strong				10%	40%	40%	10%
Strong						30%	70%

Both TOD allowances in sec/ml (as it is now) and the corresponding TOT TMF multipliers (TMF=500/allowance) are printed on the ORCSy certificates.